




# NTN BEARING de Mexico, S.A.

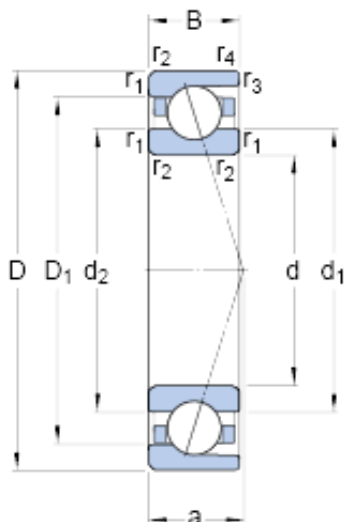

## 20 mm x 37 mm x 9 mm SKF 71904 CD/P4A Rolamentos de esferas de contacto angular

Bearing No. 71904 CD/P4A

71904 CD/P4A Bearing 2D drawings and 3D CAD models

Size	37x20x9 mm
Bore Diameter	37 mm
Outer Diameter	20 mm
Width	9 mm
d	20 mm
D	37 mm
B	9 mm
d <sub>1</sub>	25.6 mm
d <sub>2</sub>	25.6 mm
D <sub>1</sub>	31.4 mm
r <sub>1,2</sub> - min.	0.3 mm
r <sub>3,4</sub> - min.	0.2 mm
a	8.4 mm
d <sub>a</sub> - min.	22 mm
d <sub>b</sub> - min.	22 mm
D <sub>a</sub> - max.	35 mm
D <sub>b</sub> - max.	35.6 mm
r <sub>a</sub> - max.	0.3 mm
r <sub>b</sub> - max.	0.2 mm
d <sub>n</sub>	26.8 mm
Basic dynamic load rating - C	6 kN
Basic static load rating - C <sub>0</sub>	3.2 kN
Fatigue load limit - P <sub>u</sub>	0.137 kN
Limiting speed for grease	43000 r/min



## NTN BEARING de Mexico, S.A.

Lubrication	
Limiting speed for oil lubrication	63000 mm/min
Ball - $D_w$	4.762 mm
Ball - $z$	15
$G_{ref}$	0.45 cm3
Calculation factor - $f_0$	9.8
Preload class A - $G_A$	25 N
Preload class B - $G_B$	50 N
Preload class C - $G_C$	100 N
Preload class D - $G_D$	200 N
Calculation factor - $f$	1.05
Calculation factor - $f$	1
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.04
Calculation factor - $f_{2C}$	1.09
Calculation factor - $f_{2D}$	1.15
Calculation factor - $f_{HC}$	1
Preload class A	22 N/micron
Preload class B	29 N/micron
Preload class C	40 N/micron
Preload class D	56 N/micron
Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.043
EAN	7316571171890
Product Group	B04270
Enclosure	Open



## NTN BEARING de Mexico, S.A.

Precision Class	ABEC 7   ISO P4
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	15 Degree
Preload	None
Raceway Style	1 Rib Outer Ring
Cage Material	Phenolic
Rolling Element	Ball Bearing
Flush Ground	No
Inch - Metric	Metric
Other Features	Single Row   Angular Contact   High Precision
Long Description	20MM Bore; 37MM Outside Diameter; 9MM Width; Open Enclosure; ABEC 7   ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 15 Degree Contact Angle; Phenolic Cage Material; 1 Rib Outer Ring Race
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	71904 CD/P4A
Weight / LBS	0.088
Width	0.354 Inch   9 Millimeter
Outside Diameter	1.457 Inch   37 Millimeter
Bore	0.787 Inch   20 Millimeter
d <sub>1</sub>	25.6 mm
d <sub>2</sub>	25.6 mm
D <sub>1</sub>	31.4 mm



## NTN BEARING de Mexico, S.A.

$r_{1,2}$ min.	0.3 mm
$r_{3,4}$ min.	0.2 mm
$d_a$ min.	22 mm
$d_b$ min.	22 mm
$D_a$ max.	35 mm
$D_b$ max.	35.6 mm
$r_a$ max.	0.3 mm
$r_b$ max.	0.2 mm
$d_n$	26.8 mm
Basic dynamic load rating C	6.05 kN
Basic static load rating $C_0$	3.2 kN
Fatigue load limit $P_u$	0.137 kN
Attainable speed for grease lubrication	43000 r/min
Attainable speed for oil-air lubrication	63000 r/min
Ball diameter $D_w$	4.762 mm
Number of balls z	15
Reference grease quantity $G_{ref}$	0.45 cm <sup>3</sup>
Preload class A $G_A$	25 N
Static axial stiffness, preload class A	22 N/ $\mu$ m
Preload class B $G_B$	50 N
Static axial stiffness, preload class B	29 N/ $\mu$ m
Preload class C $G_C$	100 N
Static axial stiffness, preload class C	40 N/ $\mu$ m
Preload class D $G_D$	200 N
Static axial stiffness, preload class D	56 N/ $\mu$ m
Calculation factor f	1.05
Calculation factor $f_1$	1



## NTN BEARING de Mexico, S.A.

Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.04
Calculation factor $f_{2C}$	1.09
Calculation factor $f_{2D}$	1.15
Calculation factor $f_{HC}$	1
Calculation factor $f_0$	9.8
Mass bearing	0.035 kg